





Accura's incorporates sealed bearings AND nylon dust covers to protect the bearing from dust and UV that can prematurely break down the rubber bearing seals.

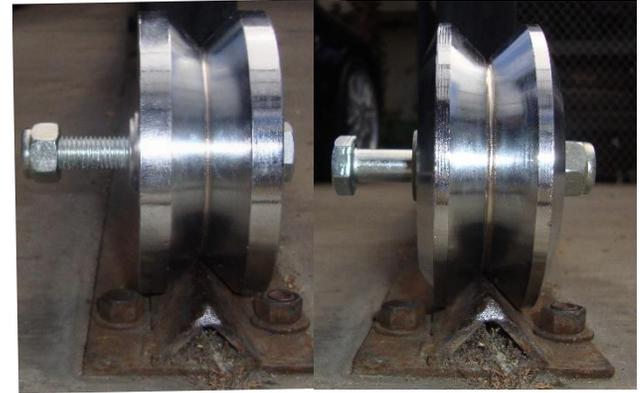

Competitor's roller won't clear the track mounting bolts

Accura's tapered footprint clears the bolts and reduces interference from rocks and debris against the track.

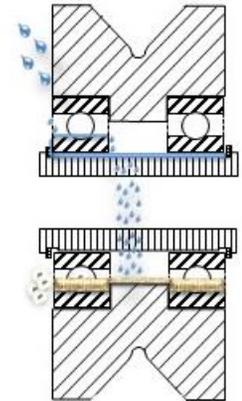

Competitor's roller uses a shielded NOT sealed bearing which permits moisture and dust to enter

Accura™ 30590 Steel V-Groove Wheel

(Gates, guards & mounting by others - no scale)

Project:



Submitted by:

Subject to change without notice
Effective July 23, 2021
© Larsen Innovations LLC 2013-2021



LARSEN INNOVATIONS LLC

Huntington Beach, CA 92648
www.LarsenInnovations.com
info@LarsenInnovations.com

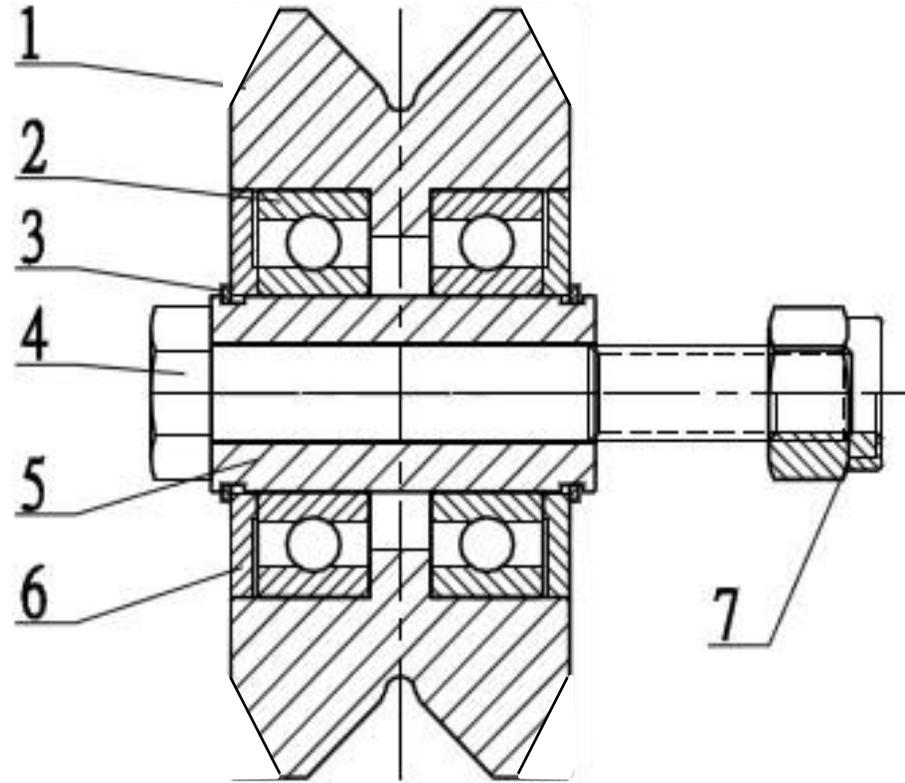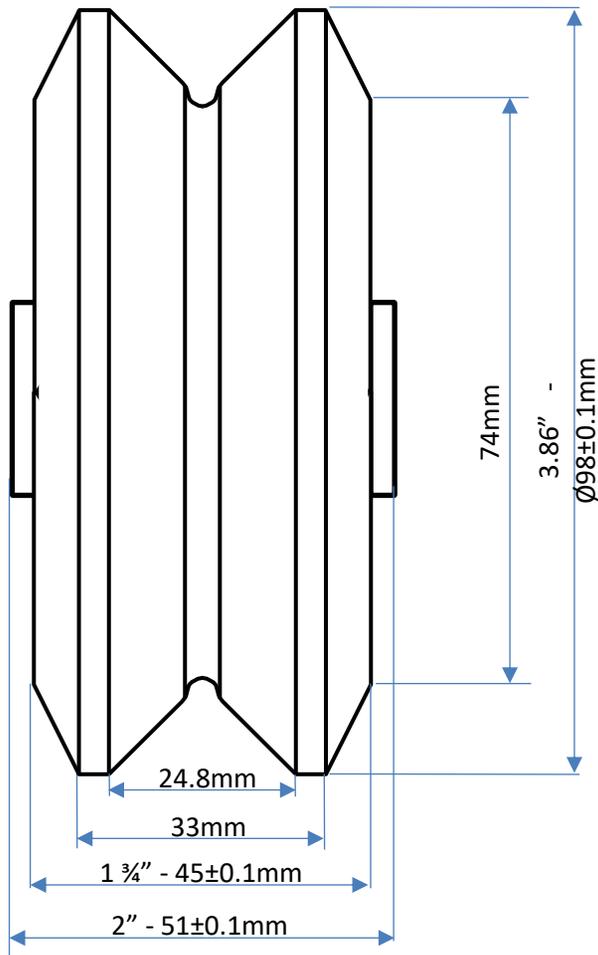

1	4" Solid Steel V-Groove Wheel – Industrial Chrome Plating – Tapered for a narrow footprint to reduce debris issues and v-track anchor bolt clearance.
2	6205-2RS Deep Groove BALL Bearings (2) Outer race press fit in the bearing
3	Snap rings (2)
4/7	M12 x 85mm bolt ($\approx 1/2" \times 3 1/4"$) – with nylon locking nut #7
5	51mm x 25mm Axle Press fit into inner bearing race
6	Exclusive UV and dust resistant protective bearing covers.

Accura™ 30590 Steel V-Groove Wheel
(Gates, guards & mounting by others - no scale)

Project:

Submitted by:

